


High Performance Paint Specification

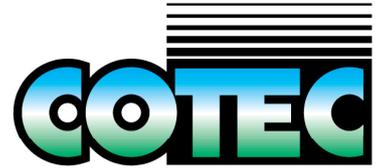

PS-C007 MAKING CONCRETE OIL/GREASE FREE

INTRODUCTION:

Oil or grease presents a problem for any coating as the adhesion to the substrate is effected, leading to subsequent failures such as blistering or de-lamination. On concrete or porous surfaces the contaminant can penetrate deeply into the surface. For minor contamination refer to PS-C006 Making Concrete Clean and Dry. This specification attempts to deal with more extreme situations.

PROCEDURE:

- 1 Ensure surface is sound, by tapping for hollow areas. These areas will need to be removed and repaired by re-plastering.
- 2 Random water spot testing will show oil/grease contamination as the water will sit on the surface as droplets and not soak into the concrete,
- 3 Bad areas of contamination require an industrial cleaner or stripper (6mm penetration is the effective maximum for this method). Refer to Coating Technologies Limited's technical department for recommendations. Some of these cleaners can be very hazardous to use in large areas and it may be more effective to use mechanical means (see paragraph 4).

After the treatment, re-test the area for water spotting, to see if all the contaminant has been removed.

- 4 If it is obvious that the oil/grease is still deep seated in the concrete, the area will need to be removed by one of the following methods:
 - (a) Jackhammer or chisels,
 - (b) Scabblers or scarifiers,
 - (c) Abrasive blasting.
 - (d) Diamond Grinding

Note: Acid etching does not remove oil/grease.

Once the area of contamination has been removed then the area will need to be repaired.

- 5 Repair the area using a concrete/cement grouting system. Trowel to smooth.
- 6 Acid wash the total surface. Refer to PS-C001 Acid Etching of Concrete with Hydrochloric Acid.
- 7 Wash surface to remove residue, then allow to dry.
- 8 The surface is ready for application of the coating recommendation.

REFER TO THE FOLLOWING SPECIFICATIONS FOR RELATED INFORMATION:

PS – C001 Acid Etching of Concrete with Hydrochloric Acid
PS – C006 Making Concrete Clean and Dry

ISSUE: 04 DATE: 1/12/13

Coating Technologies Limited, 16 Aetna Place, Henderson, Auckland, New Zealand

Phone: 0064 9 837 0897 Fax: 0064 9 837 3736 www.cotec.co.nz

Technical information given verbally or in writing is based on knowledge and research, given in good faith and believed to be reliable, but no guarantee of accuracy is made or implied. Since methods and conditions of use are beyond our control, all merchandise is sold and received subject to the condition that our liability whether express or implied for any defect in quality, or for any lack of fitness for the specified use thereof, is limited to the return of the purchase price if written claim is made within 14 days from the date of delivery. It is recommended that the user makes his or her own tests to determine the suitability of the product for his own requirements. Freedom from patent restrictions is not implied.