


# High Performance Paint Specification

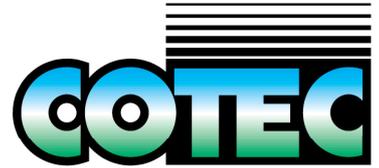

## PS-E008

# COATING MARBLE PLASTER SURFACES OF SWIMMING POOLS WITH EPOTEC EPOXY POOL PAINT

### INTRODUCTION:

In ground concrete swimming pools are often coated with 'MARBLE PLASTER'. This is a plaster made of white cement and a coarse marble aggregate, with very few fine particles.

With age the plaster surface is affected by the chemicals in the water and causes the following problems:

- 1 The cement is eroded away allowing the marble granules to dislodge and fall away.
- 2 The eroded surface becomes porous, allowing the chemicals and body fats to penetrate the plaster matrix.
- 3 The eroded surface picks up any dirt etc. from atmospheric contamination, and therefore with time the surface looks dirty and patchy.
- 4 The eroded surface has the potential to pick up algae etc. quickly if insufficient levels of chlorine are present. The surface is then a ready source of spore's, leading to rapid algae blooms.

The options to improve the surface are to remove and re-plaster or to recoat with EPOTEC. Obviously there are potential problems with the adhesion of the EPOTEC if the correct procedure is not followed.

### PROCEDURE:

- 1 The total aged surface needs to be removed. This can be done by either, using a diamond grinder with a coarse disc (30 – 40 masonry), or carefully controlled Soda, UHP or grit blasting. Refer to PS-C002 Abrasive Blast Cleaning of Concrete and Painted Surfaces. Take particular care to ensure the blasting operator is controlled as it is very easy to destroy the fairness of the surfaces. Remove all the debris.
- 2 Check all surfaces by tapping with a light hammer for 'drumming' areas. Chisel out the loose plaster till sound.
- 3 Evaluate the fairness of the sides/bottom and if necessary re-plaster badly eroded areas with conventional sand cement plaster.
- 4 Acid wash all surfaces. Refer to PS-C001 Acid Etching of Concrete with Hydrochloric Acid.
- 5 Water blast the surface with a medium pressure machine.
- 6 Allow to dry.

PTO

Coating Technologies Limited, 16 Aetna Place, Henderson, Auckland, New Zealand

Phone: 0064 9 837 0897 Fax: 0064 9 837 3736 [www.cotec.co.nz](http://www.cotec.co.nz)

Technical information given verbally or in writing is based on knowledge and research, given in good faith and believed to be reliable, but no guarantee of accuracy is made or implied. Since methods and conditions of use are beyond our control, all merchandise is sold and received subject to the condition that our liability whether express or implied for any defect in quality, or for any lack of fitness for the specified use thereof, is limited to the return of the purchase price if written claim is made within 14 days from the date of delivery. It is recommended that the user makes his or her own tests to determine the suitability of the product for his own requirements. Freedom from patent restrictions is not implied.

- 7 The surface is ready for application of a coat of EPOTEC water based sealer followed by two coats minimum of EPOTEC HB or WB. We recommend the use of EPOTEC WB Sealer on these surfaces to help bind it together and also to give the best hold out of the top coats. Refer to PS-E002 Coating a Concrete Surface with Epotec HB and WB Epoxy Paint.

ISSUE: 04      DATE: 1/12/13

